

1690 Nozzles



Husky 1690 nozzle is 30% lighter than similar nozzles.

- Nozzle designed with extra large hand opening to accommodate gloves or mittens.
- Check valve is in nozzle body, not the spout, for inexpensive and fast spout replacement.
- Includes a self-adjusting stem packing.
- Automatic shut-off with dual poppets for easy opening.
- Two position hold open latch.
- Right angle design allows nozzle to “fit” close to walls and corners.
- Cast-in protective standoffs provide durability with rough usage.
- Model 1691 includes a CUL approved spout.



New Nozzles w/ NPTF Threads

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
169010	without shear groove in spout	4.6 (2.0)
169110	with shear groove in spout	4.6 (2.0)

Rebuilt Nozzles w/ NPTF Threads


MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
169410	without shear groove in spout	4.6 (2.0)
169510	with shear groove in spout	4.6 (2.0)

New Nozzles w/ BSPP Threads

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
169038	without shear groove in spout	4.6 (2.0)

Construction

Body	Die cast aluminum body
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon
Lever	One piece contoured steel
Inlet	1½” NPTF and BSPP

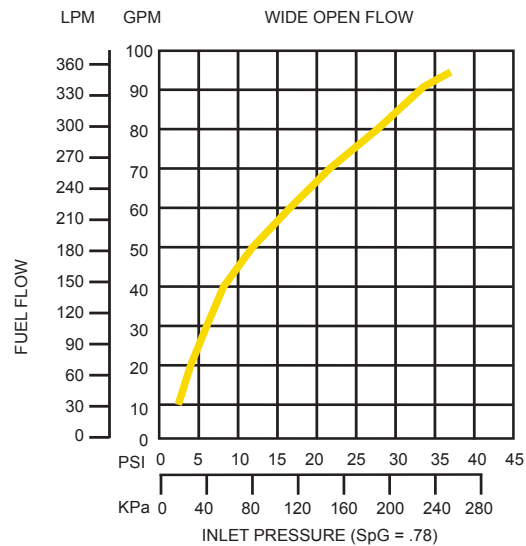

HUSKY 1690

HIGH VOLUME AUTOMATIC SHUT-OFF NOZZLE

- ACCESSORIES
- FEATURES
- DIMENSIONS

SPOUTS	Model No.	Description
	4889	1-3/8" O.D. Replacement Spout for U.S. Model 1690.
	5042	1-3/8" O.D. Replacement Spout for Canadian Model 1691.

HIGH FLOW SWIVEL	Model No.	Description
	5266	1-1/2" x 1-1/2"
	5235	1-1/4" x 1-1/4"

