

# X E85 Nozzles



## Automatic shut-off nozzle for self-service and full service stations.

- Aluminum body, spout, and internal parts are nickel plated to prevent contamination and corrosion from Ethanol blends.
- *StreamShaper™* reduces turbulence for straighter fuel flow and less splash back spillage.
- Compatible with unleaded and all Ethanol blends through E-100.
- Aluminum reinforced spout bushing keeps the spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop™ device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Husky X nozzle shut off when the gas tank is full.
- Nozzle comes with smooth Full Grip Guard.


MODEL NO. DESCRIPTION SHIPPING WEIGHT LBS (KG)

### New Nozzles

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
659404	with Three Notch Hold Open Clip	2.8 (1.2)
659459	with Three Notch Hold Open Clip and Waffle Splash Guard	3.0 (1.2)
659444	with Three Notch Hold Open Clip, Waffle Splash Guard and Flo-Equalizer™	3.0 (1.2)
659454	with Three Notch Hold Open Clip and Flo-Equalizer™	2.8 (1.2)
6594100	with Three Notch Hold Open Clip, POPD™ Full Grip Guard, Waffle Splash Guard and Sightglass	3.0 (1.2)

### CONSTRUCTION

Body	One piece die cast aluminum with Electroless Nickel Plating
Seals	Fluorocarbon
Packing	Double O-ring seal protected by fiber reinforced Teflon
Lever	One piece contoured steel with hard plastic cover.
Inlet	¼" / 19 mm NPTF

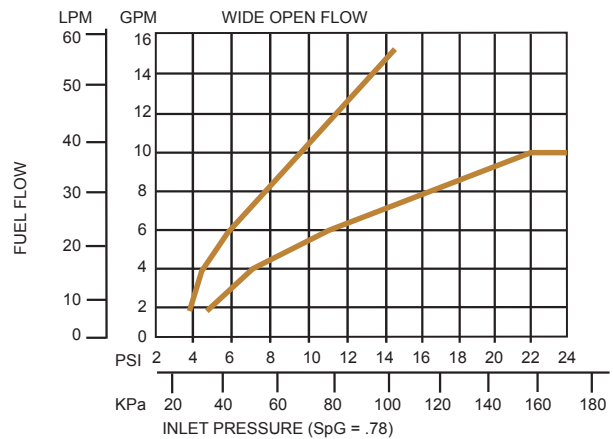

Automatic shut-off nozzle for self-service and full service stations.

## Dimensions and System Options

### Safe-T-Breaks®

MODEL NO.	DESCRIPTION
6360	¾" F x ¾" F Reconnectable E85 Safe-T-Break®
6273	¾" F x ¾" F Non-Reconnectable E85 Safe-T-Break®

### Swivels

MODEL NO.	DESCRIPTION
6350	¾" M x ¾" F Multi-plane E85 Swivel

### Spouts


MODEL NO.	DESCRIPTION
6207	Unleaded E85 Spout w/o Flo-Stop™

### Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
4620	2" Slip-On Pressure Vacuum Vent
4885	2" Thread-On Pressure Vacuum Vent - NPTF
5885	2" Thread-On Pressure Vacuum Vent with internal screen - NPTF

### Accessories, Testing, and Maintenance

MODEL NO.	DESCRIPTION
7089	Nozzle Service Kit
3593	Hold Open Clip Kit
0397	Unleaded Spout Gauge
7490	Internal Flo-Equalizer™ - 10 gpm / 37.9 Lpm

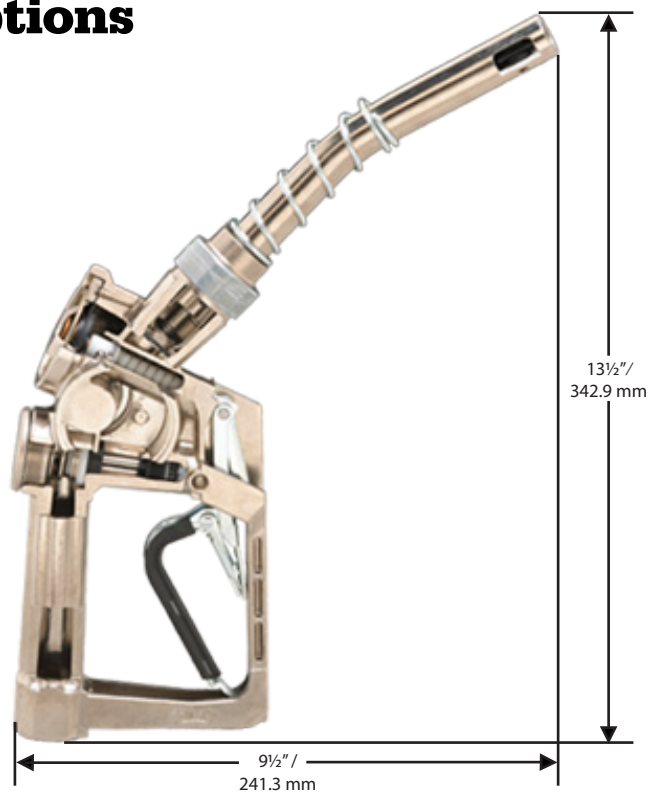

### Guards

MODEL NO.	DESCRIPTION
4145	Full Grip Guard
6665	POPD™ Full Grip Guard
1806	Full Grip Reguard
7205	POPD™ Full Grip Reguard
3795	Mate Guard
7815	POPD™ Mate Guard
1808	Waffle Splash Guard
1506	Protection Package
1809	Reguard Protection Package
3440	Mate Easy-on Package
6628	POPD™ Clear Cover
5494	Lever Guard
3376	Black Handle Guard



2325 Husky Way • Pacific, MO 63069  
 (800) 325-3558 • Fax (636) 825-7300  
[www.husky.com](http://www.husky.com) • [sales@husky.com](mailto:sales@husky.com)

MADE IN THE U.S.A. 