

# V34iS Nozzles



**Pressure activated, automatic shut-off vacuum assist nozzle for full-service, self-service and unattended stations.**

- V34iS Nozzle shuts off when
  - the pump shuts off.
  - the gas tank is full.
  - the lever is opened before the pump is turned on.
  - the leak detector has not completed the test cycle.
- Strong vapor valve in the nozzle that is mechanically operated by the on-off action of the nozzle's lever.
- Nozzle is equipped with a unique Flo-Stop™ device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- StreamShaper™ reduces turbulence for straighter flow and less splash back spillage.
- Uses conventional spout with spout ring and soft vapor escape guard.
- Husky vapor return line is an internal part of the body casting, thus eliminating potential vapor leak points and fugitive evaporative emissions from the fuel remaining in the vapor path of the hose.
- Vapor assist achieved at the body end of the spout where a vapor ring catches emissions.
- Nozzle spout is covered by a one year warranty.





## New Unleaded Nozzles

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
6675041	with Two Notch Hold Open Clip	4.0 (1.8)
6675041A	with Two Notch Hold Open Clip - Atex	4.0 (1.8)

## Construction

Body	Aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon
Lever	One piece contoured steel with hard plastic cover
Inlet	M34 x 1.5

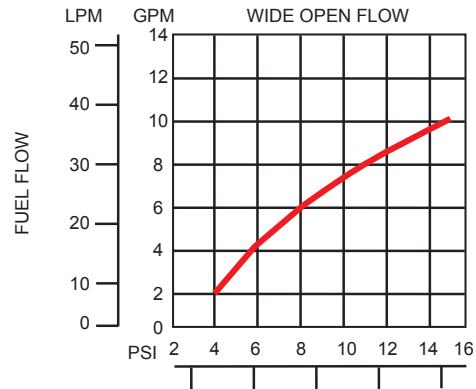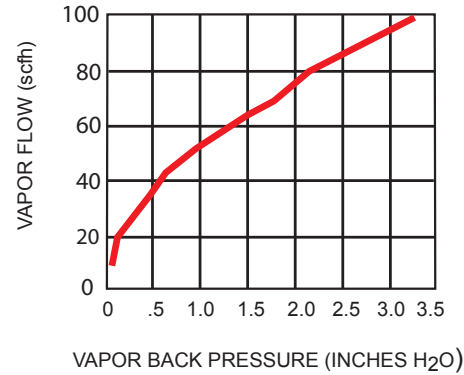

Pending